



INFINITY H 28v


Overview

Infinity H-28V merupakan kamera berbentuk dome dan memiliki infra merahnya dengan jangkauan sampai dengan 40 meter. Kamera ini menggunakan chipset high-end sony superHAD2 dengan resolusi 700 TVL. Memiliki case yg terbuat dari material tahan air dan tahan sabotase (vandalproof) . Kamera ini menggunakan lensa varifocal sehingga mudah untuk menyesuaikan dengan lebar ruangan/objek yang ingin dipantau.

Key Feature

- Compact design
- Sony SuperHAD2 Infinitycctv.com.tw all rightreserved 2013
- IR cut filter with auto switch
- Min. illumination: 0.1 Lux @ F1.2 (0 Lux with IR)
- Auto white balance, auto gain control, electronic shutter control and backlight compensation
- Smart IR mode
- Internal Synchronization
- Advanced Engineering Design, High Reliability
- Ingress Protection: IP66
- Adopt a mount for routing cables through

Dimension

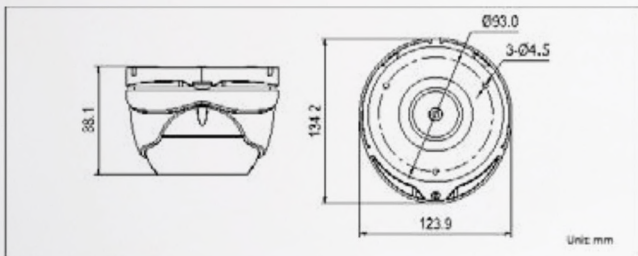

Specification

Model	H-28V
Parameter	Infinitycctv.com.tw all rightreserved 2013 700TVL IR Dome Camera (ICR & Vari-focal & Weather-proof)
Camera	
Image Sensor	1/3"
Signal System	PAL/NTSC
Effective Pixels	976 (H) × 496 (V)
Min. Illumination	0.1Lux @ (F1.2,AGC ON) ,0 Lux with IR 0.14Lux @ (F1.4,AGC ON),0 Lux with IR
Shutter Speed	PAL: 1/50 s to 1/100,000 s NTSC: 1/60 s to 1/100,000 s
Lens	2.8 - 12 mm @ F1.4 Angle of view: 80° - 27.2°
Lens Mount	φ14
Angle Adjustment	Pan: 0 - 360°, Tilt: 0 - 90°, Rotation: 0 - 360°
Day & Night	IR cut filter with auto switch
Horizontal Resolution	700 TVL
Synchronization	Internal synchronization
Video Output	1Vp-p composite output (75 Ω/BNC);
S/N Ratio	More than 62 dB
General	
Working Temperature/Humidity	-40 °C - 60 °C (14 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12 V DC ± 10%
Power Consumption	Max. 4 W (Max. 7.5W with IR cut filter on)
Ingress Protection	IP66 Infinitycctv.com.tw all rightreserved 2013
IR Range	Approx. 30 to 40 meters
Dimension	134.2×123.9×88.1mm(5.28"×4.88"×3.47")
Weight	800g (1.76l lbs)