



INFINITY H-26


Overview

Infinity H-26 merupakan kamera berbentuk dome dan memiliki infrared dengan jangkauan sampai dengan 20 meter. Kamera ini menggunakan chipset high-end sony superHAD2 dengan resolusi 700 TVL. Memiliki case yg terbuat dari material tahan air dan tahan sabotase (vandalproof)

Key Feature

- Compact design
- Sony SuperHAD2
- Min. illumination: 0.1 Lux @ F1.2 (0 Lux with IR)
- IR cut filter with auto switch
- Auto white balance, auto gain control, electronic shutter control and backlight compensation
- Advanced Engineering Design, High Reliability
- Ingress Protection: IP66 Infinitycctv.com.tw all rightreserved 2013

Dimension

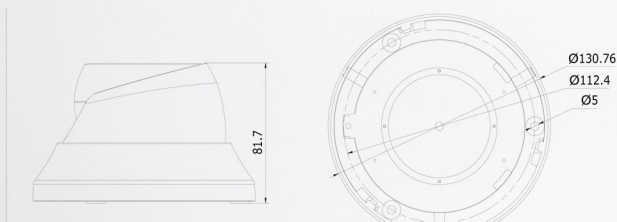

Specification

Model	Infinity H-26
Parameter	<small>Infinitycctv.com.tw all rightreserved 2013</small> 700 TVL Sony SuperHad2
Camera	
Image Sensor	1/3"
Signal System	PAL/NTSC
Effective Pixels	976(H)×496(V)
Min. Illumination	0.1Lux @ (F1.2,AGC ON),0 Lux with IR 0.2Lux @ (F1.8,AGC ON),0 Lux with IR
Shutter speed	PAL: 1/25 s to 1/15,000 s NTSC: 1/30 s to 1/15,000 s
Lens	3.6mm @ F1.8 (4mm optional), Angle of view: 70° (3.6mm)
Lens Mount	M12
Angle Adjustment	Pan: 0 - 360°, Tilt: 0 - 75°, Rotation: 0 - 360°
Day & Night	IR cut filter with auto switch
Horizontal Resolution	700 TVL
Synchronization	Internal synchronization
Video Output	1Vp-p composite output (75 Ω/BNC)
S/N Ratio	More than 52 dB
General	
Working Temperature/Humidity	-40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12 V DC ± 10%
Power Consumption	Max. 3 W(Max. 6.5 W with IR cut filter on)
Ingress Protection	IP66
IR Range	Approx. 10 to 20 meters
Dimensions	Φ130.76×81.7mm(φ 5.15" x 3.22")
Weight	700 g (1.54 lbs)