



# INFINITY I 72


## Overview

Infinity I-72 merupakan ip camera yang berbentuk dome yang memiliki resolusi 1.3 Megapixel dan memiliki infrared dengan jangkauan sampai dengan 30 meter. Kamera ini didesain tahan air sehingga dapat dipasang diluar ruangan serta mendukung fitur poe

## Key Feature

- Up to 1.3 megapixel (1280 x 960) resolution
- Standard video compression with high compression ratio
- Progressive scan CMOS, capture motion video without incised margin
- Support dual stream, and the sub-stream for mobile surveillance
- High-performance and long service life Infrared LED, Approx. 10 to 30 meters IR range
- IR cut filter with auto switch
- PoE (Power over Ethernet)
- Ingress Protection level: IP66
- Electronic shutter for different surveillance environments
- Impact Protection: IEC60068-2-75 test, Eh, 50J; EN50102, up to IK10
- Other functions: alarm, mirror, etc.

## Dimension

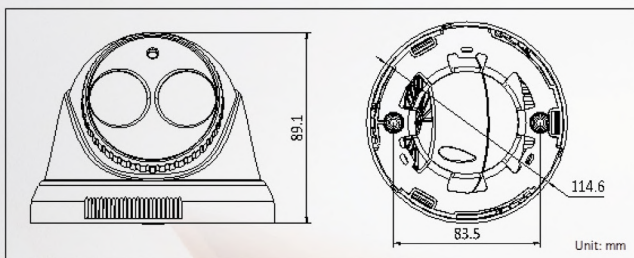

## Specification

Model	I-72
Parameter	1.3 Megapixel CMOS Vandal-proof Network Dome Camera
<b>Camera</b>	
Image Sensor	1/3" Progressive Scan CMOS
Min. Illumination	0.01Lux @ (F1.2, AGC ON), 0 Lux with IR
Shutter Speed	1/25 s to 1/100,000 s
Lens	4mm@ F2.0, Angle of view:75.8° (2.8mm, 6mm, 12mm optional)
Lens Mount	M12
Day &Night	IR cut filter with auto switch
Digital Noise Reduction	3D DNR
Wide Dynamic Range	Digital WDR
Angle Adjustment	Pan:0° - 355°, Tilt: 0° - 65°
<b>Compression Standard</b>	
Video Compression	H.264/ MJPEG
H.264 Type	Main Profile <small>Infinitycctv.com by all right reserved</small>
Video Bit Rate	32 Kbps – 16 Mbps
Dual Stream	Yes
<b>Image</b>	
Max. Resolution	1280 x 960
Frame Rate	50 Hz: 25 fps (1280 x 960), 25 fps (1280 x 720) 60 Hz: 30 fps (1280 x 960), 30 fps (1280 x 720)
Image Settings	Saturation, Brightness, Contrast adjustable by client software or web